

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
9 October 2003 (09.10.2003)

PCT

(10) International Publication Number
WO 2003/083349 A1

(51) International Patent Classification⁷: **F16M 1/00**,
B01F 13/10

[IT/IT]; Via Loschi, 13, 41038 S. Felice sul Panaro
(Modena) (IT). FIFIELD, Bruce [US/IT]; Via Crema, 15,
20135 Milano (IT).

(21) International Application Number:
PCT/IB2003/001160

(74) Agents: PROVVISIONATO, Paolo et al.; Provvisionato
& Co S.r.l., Piazza di Porta Mascarella, 7, 40126 Bologna
(IT).

(22) International Filing Date: 25 March 2003 (25.03.2003)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data:
BO2002A000160 28 March 2002 (28.03.2002) IT

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): CPS
COLOR EQUIPMENT S.P.A. [IT/IT]; Via dell'Agricol-
tura, 103, I-41038 San Felice sul Panaro (Modena) (IT).


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): GRECO, Guido

[Continued on next page]

(54) Title: MACHINE STRUCTURE, IN PARTICULAR FOR HANDLING FLUID PRODUCTS, AND PROCESS FOR ASSEMBLING IT

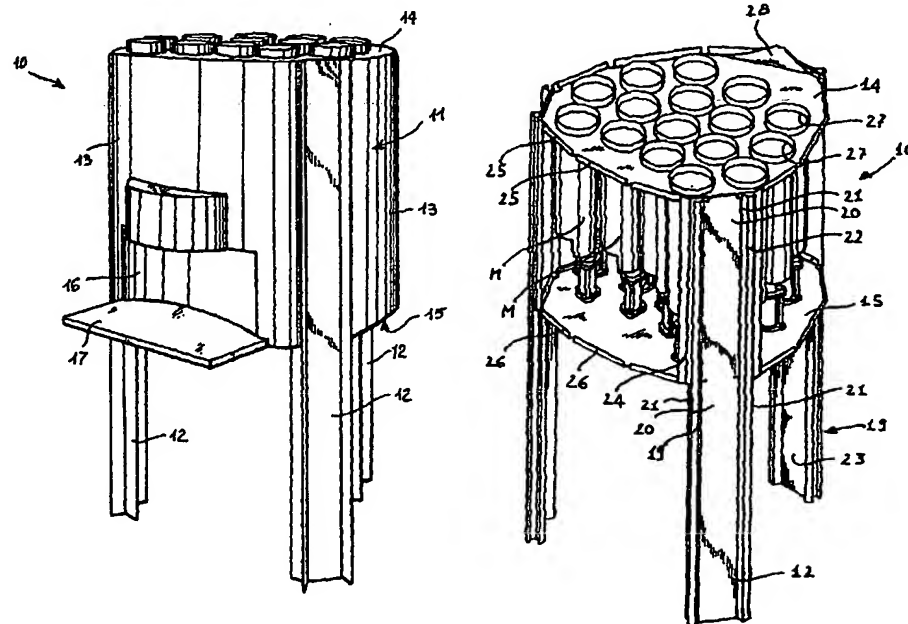

(57) **Abstract:** A machine structure, in particular for the processing of fluid products, comprises a loadbearing frame with vertical uprights (12) connected by two horizontal plates (14, 15) at a distance from each other. Between the uprights are located one or more removable covering panels (13) which cover the zone housing the machine components. The machine structure is strong but light, not very bulky and easy to assemble even by non-specialist personnel.

WO 2003/083349 A1